

PDM-9006NG



Nomenclature	Single Phase Ammeter
Bezel Size	96mmX96mm
Rating/Range	5A, Aux Supply 160-270 Volts, On-Site Programmable, CL 1.0
Display	Single Line LED (4 Digit LED Display)
Features	Display for Showing Current

PDM-9002NG



Nomenclature	Single Phase Voltmeter
Bezel Size	96mmX96mm
Rating/Range	Upto 500Volts, CL 1.0
Display	Single Line LED (4 Digit LED Display)
Features	Display for Showing Voltage

PDM-9007NG



Nomenclature	Three Phase Ammeter
Bezel Size	96mmX96mm
Rating/Range	5A, Aux Supply 160-270 Volts, On-Site Programmable, CL 1.0
Display	Single Line LED (4 Digit LED Display)
Features	Display for Showing Three Phase Current

PDM-9003NG



Nomenclature	Three Phase Voltmeter
Bezel Size	96mmX96mm
Rating/Range	Upto 500 Volts, CL 1.0
Display	Single Line LED (4 Digit LED Display)
Features	Display for Showing Voltage of Three Phase (L-N & L-L)

PDM-9030NG



Nomenclature	Three Phase VAF
Bezel Size	96mmX96mm
Rating/Range	5A, Upto 500 Volts, 160-270 Volts, On-Site Programmable, CL 1.0
Display	Three Line LED (3 Rows 4 Digit LED Display)
Features	Display Showing Voltage, Current and Frequency.

PDM-9025-LE-RS



Nomenclature	Three Phase KWH Meter (Dual Source)
Bezel Size	96mmX96mm
Rating/Range	5A, 3X240V, Aux Supply 160-270 Volts, CL 1.0
Display	Single Line LED (6 Digit LED Display)
Features	KWH with field programmable CT Ratio & RS 485 Modbus Communication

PDM-9023



Nomenclature	Three Phase KWH Meter with Power Monitor
Bezel Size	96mmX96mm
Rating/Range	5A, 3X240V, Aux Supply 160-270 Volts, CL 1.0
Display	Two Line LCD (6 Digit LCD Display)
Features	KWH with field programmable CT Ratio. Line Voltages Vr,Vy,Vb with respect to neutral. Line Currents Ir,Iy,Ib Line Frequency, Average PF, Active Power, Rph,Yph,Bph and Summation. EB On Hour.

***Note:** Direct reading upto 100Amps, RS 485 Modbus Communication is Available

PDM-9022



Nomenclature	Three Phase KWH Meter
Bezel Size	96mmX96mm
Rating/Range	5A, 3X240 Volts, CL 1.0
Display	Counter Type KWH (6 Digit)
Features	KWh Mechanical Counter

PDM-9025



Nomenclature	3 Phase Dual Source KWH Meter with Power Monitor
Bezel Size	96mmX96mm
Rating/Range	3X240Volts, 1A/5A Aux Supply 160-270Volts, On-Site Programmable, CL 1.0
Display	Two Lines LCD Display (6 Digit LCD Display)
Features	Display for Showing Line Voltage, Line Currents, Line Frequency, Active Power R Phase, Y Phase, B Phase & Summation , EB on Hour, DG on Hour.
Note: Direct Reading upto 100Amps,RS485 Modbus Communication Optional	

PDM-9124RS



Nomenclature	3 Phase Multi Function Meter
Bezel Size	96mmX96mm
Rating/Range	3X240Volts, 1A/5A Aux Supply 160-270Volts, On-Site Programmable, CL 1.0
Display	3 Line LED (3 Rows, 4 Digit LED Display)
Features	Voltage, Current, Frequency,KW,KWh,KVA,KVAh,KVAR, KVARh,THD.
Note: RS485 Modbus Communication Optional	

PDM-9400RS




Nomenclature	Maximum Demand Controller
Bezel Size	96mmX96mm
Rating/Range	3X240V,1A/5A, Aux Supply 160-270V, CL 1.0
Display	3 Line LED
Features	Voltage, Current, Frequency,KW,KWh,KVA,KVAh,KVAR, KVARh,THD. Maximum Demand Controller with two relay contacts.
Note: RS485 Modbus Communication Optional	

Our Product Range:

- ★ Earth Leakage Relay With CBCT/ZCT
- ★ IDMT Earth Fault Relay
- ★ Restricted Earth Fault Relay
- ★ Numerical Over Current and Earth Fault Relay
- ★ Over Current Relay
- ★ Reverse Power Relay
- ★ Motor Protection Relay
- ★ Trip Circuit Supervision Relay
- ★ Master Trip & Auxiliary Relay
- ★ Voltage Relay /Line Voltage Monitoring
- ★ Under Frequency/ Over Frequency Relay
- ★ Numerical Under and Over Voltage Relay
- ★ Phase Failure Relay
- ★ Transformer Differential Relay
- ★ Auto Source Changeover Cum Current Limiter
- ★ Digital Panel Meters

Mechanical Dimensions

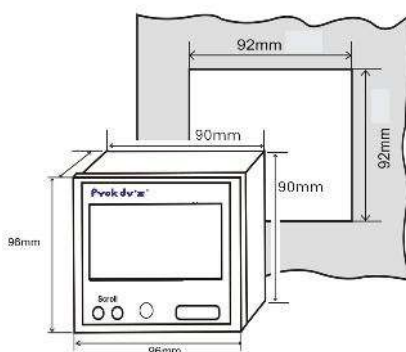

Authorised Distributor -

Prime Industrial Services

Office No.45, Prestige Point, Bajirao Road Pune - 411002

Email - primeindustry1@gmail.com,

sales@primeindustrial.in

www.primeindustrial.in